

## Enhancing Soft Clay Soil Properties Using Geo-Reinforced Stone Column Methods

Abdullah Hassan A.<sup>1</sup> and Fatima Ahmed B.<sup>2</sup>

Department of Mechanical Engineering, King Abdulaziz University, Jeddah - 21589, Saudi Arabia<sup>1</sup>  
 Department of Civil Engineering, King Abdulaziz University, Jeddah - 21589, Saudi Arabia<sup>2</sup>

### ABSTRACT

A very fast development of Infrastructures sector i.e. construction of mega structures like Express highways and railways and tunnels, bridges and tall buildings in all parts of the world, the availability of suitable ground for the construction of civil engineering mega structures becomes a challenge for today's geotechnical engineers. There are various ground improvement techniques present to strengthen the weak and soft soils based on the type of application. One of the most extremely used ground improvement method is a Stone column technique for soft clay soils. Where the bearing capacity of soft soils can be improved and also the stability of structure and reduces the settlement issues up to some permissible limits. This method was adopted in European countries since 1950s. But now days, the utilization of geo synthetic materials are very popular because of their various multi functions based on the applications like reinforcement, separation, filtration and confinement, containment etc. This article presents a review of previous experimental studies on the performance of unreinforced soft soils improvement the bearing capacity with reinforced sand bed over stone column. The paper explores the new ideas where more research can be done by using geo reinforced stone column technique to improve the bearing capacity and stiffness of soft clay soils.

**KEYWORDS:** Ground Improvement, geo synthetic, stone column, soft soil, reinforced sand

### I. INTRODUCTION

Stone column is one of the most commonly used soil improvement technique. Which has been utilized worldwide to increase the bearing capacity of soft soils and reduce the settlement of super structures constructed over it, improve slope stability, reduces seismic subsidence also reduce lateral spreading and liquefaction potential etc. Many researchers have been carried out to study the behavior of stone column – reinforced ground over the past three decades. Conventional stone columns are typically used to improve the engineering properties of soft soils for the support of lightly and moderately loaded structures such as a motorway embankments and large diameter storage tanks. When the stone columns are installed in very soft clays, they may not derive significant load capacity due to the low lateral confinement. McKenna et. al.(1975) reported that where the stone column was not restrained by the surrounding soft clay which lead to excessive bulging and also the soft clay squeezed into voids of the aggregate. In such situations, the stone column itself may need to be provided with additional confinement for its improved performance.

A number of methods are available to improve the load carrying capacity and decreases the settlement issues of soft soils. Such as Stone columns (Greenwood,1970; Hughes et.al., 1975), Lime treatment(Rajasekaran and Rao, 2002) soil cement columns(Rampello and Callisto,2003)vacuum pre-consolidation (Indraratna et. al.,2004) pre-consolidation using pre-fabricated vertical drains (Shen et. al.2005) etc. From all these techniques, the stone column method is a preferred because it gives the benefit of reduced settlements and increasing the consolidation process due to reduction in flow path lengths. The main advantage of this method is the easy and simple in construction (Murugesan and Rajgopal, 2006). Further Development in the stone column technique is reinforcing the column using either horizontal layers of reinforcement (Sharma.R.S. et. al.2004) or encasing the individual stone column by geo synthetic (Raithel and Kempfert,2000; Raithel et. al. 2002) over the full or partial height of the column. The geo synthetic encasement will increase the load carrying capacity of stone columns by many folds due to the additional confinement from the geo synthetic. The geo synthetic encasement also prevents the lateral squeezing of stones when the stone column is installed in extremely soft soils, leading to minimal loss of stones and quicker installation.

The granular bed can be further reinforced with geogrid to enhance the load carrying capacity and reduce the settlement of the stone column –improved soft clay. Han and Gabr (2002) performed a numerical analysis of geosynthetic –reinforced and pile –supported earth plat forms over soft soil. Based on lumped parameter modeling approach, models have been developed for single layer (Deb et. al., 2007) and multilayer (Deb et. al., 2008) geo synthetic–reinforced granular bed resting on stone column improved soft soil. Malarvizhi and Ilamparuthi (2004) reported that the improved performance of geo synthetic –encased stone columns based on small –scale laboratory tests on end bearing as well as floating columns. Raithel and Kempfert (2000) and Raithel et. al. (2002) studied the performance of geo synthetic –encased sand columns through numerical and

analytical models. Aydat and Hanna (2005) performed experimental investigation on the load carrying capacity of a stone column increases with an increase in the stiffness of the geo fabric material used to encapsulate the sand column.

Stone columns in compressive load fail in different modes such as bulging Huges and Withers (1974), Huges et.al(1976) general shear failure Madhav and Vitkar(1978) and sliding failure Aboshi et.al (1979). A long column having length more than its critical length i.e about 4 times the diameter of the column fails by bulging. McKelvey et.al (2004) has carried out experimental studies on a group of five stone columns and reported that the central column deformed or bulged uniformly, whereas the edge columns bulged away from the neighboring columns. The unit cell concept has also been used by Abhijit and Das (2000),Goughnour(1983) and Sathish et.al (1997).Alamgir et.al(1996) proposed an elastic approach to predict the load sharing and resulting settlement of ground improved by stone columns assuming free strain condition. Shahu.et.al (2000) find out the effects of a granular mat over the improved ground on its over response within the framework of equal strain theory and unit cell concept

Based on various literature review studies on the behavior of stone columns have been studied. The research studies have been conducted on different parameters like

- Behavior of stone columns with geo grid encasements.
- Behavior of stone column in various types of soils.

*Table 1. Shows some relevant latest research literatures*

REFERENCES	EXPERIMENTAL DETAILS	REMARKS
Mahmoud Ghazavi et.al (2018)	<ul style="list-style-type: none"> <li>• Model test tank Dimensions</li> <li>Length - 1200 mm</li> <li>Width -1200 mm</li> <li>Depth -900 mm</li> <li>• Classification of soil :CL</li> <li>• Stone column Data:</li> </ul>	<ul style="list-style-type: none"> <li>• The ultimate bearing capacity stiffness of ordinary stone columns has increased by the use of horizontal reinforcing geo synthetic materials.</li> </ul>
	<ul style="list-style-type: none"> <li>Diameter : 60,80,100 mm</li> <li>Depth :300,400,500 mm</li> <li>• Geo synthetic used: Non woven Geotextile, Biaxial geogrid etc</li> <li>• Internal reinforcements:</li> <li>Vertical encasement</li> <li>Horizontal reinforcement</li> </ul>	<ul style="list-style-type: none"> <li>.The horizontally reinforced layers placed at spacing of 0,25D of stone column has bearing capacity is 30% greater than the vertically encased stone column bearing capacity.</li> </ul>
Prasenjit Debnath and Ashim Kanti Dey ( 2017)	<ul style="list-style-type: none"> <li>Model test tank Dimensions</li> <li>Length –1000 mm</li> <li>Width -1000 mm</li> <li>Depth -1000 mm</li> <li>Classification of soil :CL</li> <li>Stone column Data:</li> <li>Diameter :50 mm</li> <li>Depth : 300 mm</li> <li>Spacing: 125 mm c/c</li> <li>Geogrid , Geo textile etc.</li> <li>Internal reinforcements:</li> <li>Geogrids are used in layers</li> <li>Geotextiles are used as encasement of stone columns. Geo synthetic used: Biaxial</li> </ul>	<ul style="list-style-type: none"> <li>The bearing capacity of the soft clay soil was increased with geo reinforced sand bed as compare with ordinary stone columns without reinforced sand bed and also found that the optimum thickness of unreinforced sand bed and geo reinforced sand bed can be taken equal to 0.2 times and 0.15 times the diameter of the footing.</li> <li>• The reduction in bulging effect and increased in bulging depth with the provision of geo reinforced sand bed.</li> </ul>

Mahmoud Ghazavi and Javad Nazari Afshar (2013)	<p>Model rigid footing Data:</p> <p>Rigid Steel plate</p> <p>Diameter : 200 mm</p> <p>Thickness : 15mm</p> <ul style="list-style-type: none"> <li>• Model test tank Dimensions</li> <li>Length -1200 mm</li> <li>Width -1200 mm</li> <li>Depth -900 mm</li> <li>• Classification of soil :CL</li> <li>• Stone column Data:</li> <li>Diameter : 60,80,100 mm</li> <li>Depth : mm</li> <li>• Geo synthetic used: Non woven poly propylene geotextiles</li> <li>• Internal reinforcements:</li> <li>Encasement of geotextiles</li> <li>• Model rigid footing Data:</li> <li>Rigid Steel circular plate Diameter : 200 mm</li> <li>• Thickness : 30 mm</li> </ul>	<ul style="list-style-type: none"> <li>• The optimum length of a group of floating with geo reinforced sand bed is six times the diameter of the stone column. The optimum depth of encasement of the group floating stone column is three times the diameter of the column.</li> <li>• The ultimate load carried by soft soil increases by using ordinary stone columns. The ultimate load and stiffness of the treated soil can be further increase by use of vertical encased stone column reinforcing material. The lateral bulging amount decreases in vertical encased stone columns with ordinary stone columns due to additional lateral confinement provided by geo synthetic materials. With increasing the length and strength of reinforcing encasement, the ultimate capacity and stiffness of stone columns increases. The bulging failure usually occurs at a depth of D to 2D from the stone column top.</li> </ul>
Lakshmikant Yadu and Tripathi .R.K (2013)	<ul style="list-style-type: none"> <li>• Model test tank Dimensions</li> <li>Length -1820 mm</li> <li>Width - 305 mm</li> <li>Depth -914 mm</li> <li>• Classification of soil :CL</li> <li>• Model rigid footing Data:</li> <li>Length : 305mm</li> <li>Width : 76.2 mm</li> <li>Thickness : 25.4mm</li> <li>• Geo synthetic used: Bi axial polyester Geogrid</li> <li>• Internal reinforcements:</li> <li>Horizontal layers of geo grid, Granulated Blast furnace slag.</li> </ul>	<ul style="list-style-type: none"> <li>• Reinforced GBS bed overlay on soft soil bed improves load bearing capacity &amp; decreases the settlement of the soft subgrade soil bed. Geogrid reinforced GBS of ratio to width of tank to the width of footing at two increases the settlement reduction ratio as 84% at ultimate bearing capacity of soil. Based on the bearing capacity ratio value and economy in the field application the of width of the tank to width of footing of four is considered as effective length of geogrid.</li> </ul>

Koushik Deb.et.al (2010)	<ul style="list-style-type: none"> <li>• Model test tank Dimensions</li> <li>Length -525 mm</li> <li>Width -525 mm</li> <li>Depth -400mm</li> <li>• Classification of soil :CL</li> <li>• Stone column Data:</li> <li>Diameter : 50 mm,</li> <li>Depth : 300 mm</li> <li>• Geo synthetic used: Geo grid</li> <li>• Internal reinforcements:</li> <li>Geo grid used as a layer</li> <li>• Model rigid footing Data:</li> <li>Rigid Steel circular plate</li> <li>• Diameter : 100 mm, Thickness :12.5mm</li> </ul>	<p>The presence of stone columns in soft clay improves the load carrying capacity and decreases the settlement of the soft clay. The placement of sand bed further increases the load carrying capacity and decreases the settlement of the stone column improved soil.</p> <p>• The inclusion of geo grid as reinforcing element in the sand bed significantly improves the load carrying capacity and reduces the settlement of the soil. The optimum thickness of unreinforced sand bed placed over the stone column improved soft clay is 1.7 times the optimum thickness of the geo grid reinforced sand bed. The optimum thickness of un reinforced and geogrid reinforced sand bed is 0.5 and 0.3 times the diameter of the footing.</p>
--------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## II. CONSTRUCTION METHODS OF STONE COLUMNS

Construction of stone columns can be done by the following two methods

- Vibro Compaction Method
- Vibro Replacement method

The first method is used for the densification of soil whose particle size is varying from 0.02 mm to 80 mm. The main aim of this method is densification of soil where the density would be increases and significantly improve the bearing capacity of the treated soil. This method is only suitable for coarse grained soils e.g. sand and gravel

The second method is used for the fine grained soils whose particle size is less than 0.02 mm. To overcome the problem of vibro compaction this method was introduced. In this method, the density is not enhanced by vibrations. There are different types of installations methods of stone columns are: 1. Dry methods 2.Wet methods The dry method is sub divided into two methods a) Dry Top feed method b) Dry Bottom feed method.


## III. APPLICATIONS OF STONE COLUMNS

- Increases the soil bearing capacity and shear strength of soils
- It reduces the settlements in soils
- Increases the resistance to Liquefaction
- Improve the slope stability of embankments
- Increases the friction angle and shear modulus
- In storage tank foundations
- Footings – Isolated / Raft

## IV. DIFFERENT PATTERNS OF STONE COLUMN TECHNIQUE

Stone column should be installed preferably in an equilateral triangular pattern which provides the densest packing also a square pattern may be used.

**Figure: 1** Plan of stone column, Square pattern and Triangular pattern (Cabe,2007)

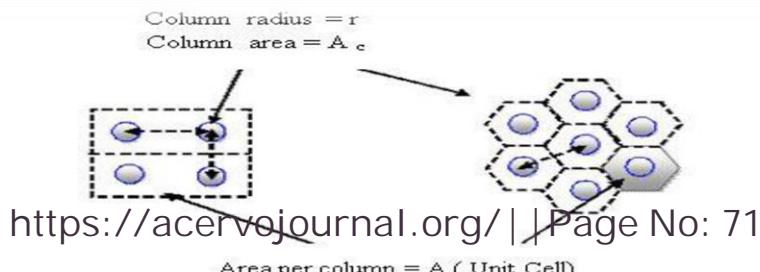


## V. STONE COLUMNS FAILURE MECHANISM

The results and discussion may be combined into a common section or obtainable separately. They may also be broken into subsets with short, revealing captions.

The failure mechanism of a single stone column loaded above its area significantly depends on the length of the column. Many researchers have done work on this parameter and found that about four times diameter lengths of the columns were significantly strained. If the stone column installed in layered soils, the maximum bulging was observed at a depth of one times the column diameter from the top and the total length of the stone column subjected to bulging was observed to be two to three times the column diameter. The ultimate strength of an isolated column loaded at its top is primarily governed by the maximum lateral reaction of the soil around the bulging zone. If the length diameter ratio is less than four then column would fail in end bearing before bulging. For the short columns, the punching failure was reported whereas bulging was significant in long columns. Fig 2-I. The area which has been shown with dash-lines is most probable to have bulging effect within. In the case where a rigid short column is assumed (Fig 2-II), the main criteria which controls the failure is bearing capacity of failures which are denoted by stress and strain bulbs which follows Terzaghi and Meyerhof type of analysis.

**Figure 2:** Failure mechanism of a single stone column in a homogeneous soft layer

(Ghani&Kasliwal,2008)

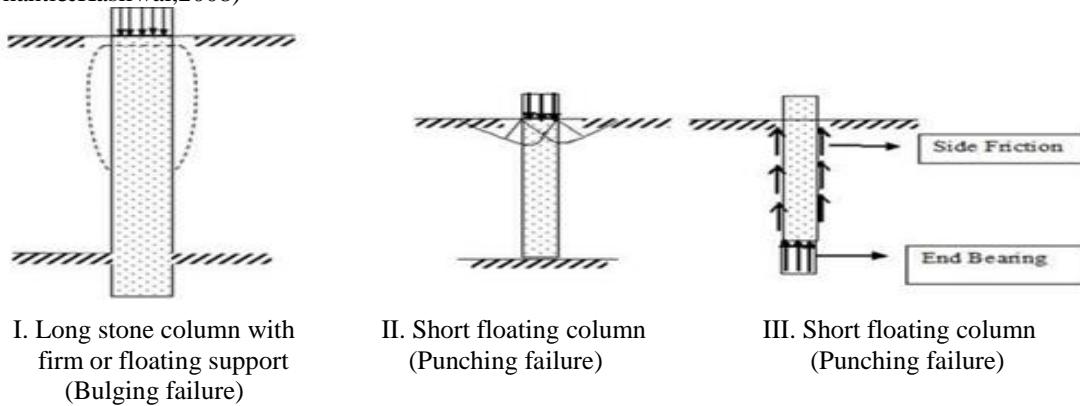

## VI. CONCLUSION

Based on the critical review of the available literature on stone columns some specific conclusions have been found.

- Stone column technique is the economical method for improving the load carrying capacity of soft clay soils and decreases the settlement rate. It can be constructed by any two methods.
- Stone columns with geo reinforcement have improved the bearing capacity of soft clay soils.
- The stone column bearing capacity has increased with increasing the friction angle of granular materials and stone column diameter.
- The bearing capacity improvement of soft clay soils may not be give better results due to low lateral confinement. To resolve this issue geo synthetic materials are used for encasement of stone columns so that it improved the performance.
- The ultimate bearing capacity of the reinforced stone column increases with the stiffness of the reinforcement.
- By using geo synthetic materials in stone columns as encasement proves reduction in settlement.
- Much research work has been carried out to study the behavior of columns without reinforcement as well as with reinforcement

When the ordinary stone columns are installed in soft clay soils, the load carrying capacity is less due to low confinement. Such kind of issues can be resolved by adopting suitable latest geo synthetic material encasement of stone column so that it can provide sufficient confinement.

## VII. REFERENCES

- [1] S.Abbijit, and S.C.Das, "Interaction analysis of stone column groups in foundations" Proc., Indian Geotech. Conf., Bombay, India, 279–284,2011
- [2] H.Aboshi,E.Ichimoto,K.Harada, and M.Emoki, "The composer—A method to improve the characteristics of soft clays by inclusion of large diameter sand columns". Proc., Int. Conf. on Soil Reinforcement., E.N.P.C., 1, Paris, 211–216,1979
- [3] M.Alamgir, N.Miura, H.B.Poorooshasb, and M.R. Madhav, "Deformation analysis of soft ground reinforced by columnar inclusions "Comput. Geotech., 184,267–290,1996
- [4] D.Alexiew,et.al, "Geotextile encased columns (GEC):Load capacity, geotextile selection and pre – design graphs" .Contemporary Issues in Foundation Engineering .Anderson,2005
- [5] K.Ali, J.T.Shahu ,and K.G.Sharma, "Model tests on single and s groups of stone columns with different geo synthetic arrangement", Geosynth ,Int .21 (2) ,103-118,2014
- [6] K.Ali,J.T.Shahu, and K.G.Sharma, "Model tests on geosynthetic-reinforced stone columns: a comparative study" Geosynth ,Int .19 (4) ,292-305,2012
- [7] A.P.Ambily, and S.R.Gandhi, "Effect of sand pad thickness on load sharing in stone column". In IGS, December 14-16<sup>th</sup>,2006 Chennai.
- [8] A.P.Ambily, and S.R.Gandhi, "Behavior of stone columns based on experimental and FEM analysis". J Geotech Geoenviron Engg ASCE 133 (4): 405-415,2007
- [9] T.Ayadat, and A.M. Hanna, and A.Hamitouche, "Soil Improvement by internally reinforced stone column" Ground Improv,161 (2),55-63,2008
- [10] T.Ayadat, and A.M. Hanna, "Encapsulated stone columns as a soil improvement technique for collapsible soil".Ground Improv 9(4):137-147,2005
- [11] M.R.D.Babu,et.al, "Critical review of construction, Analysis and Behavior of stone columns. Geotech Geol Engg 31, 1-22,2013
- [12] J.A.Black,et.al, "Reinforced stone columns in weal deposits: Laboratory model study". J. Geotech Geoenviron Engg ASCE 133(9) ,1154-1161,2007
- [13] J.Castro, and C.Sagaset, "Deformation and consolidation around encased stone columns" .. Geotextiles and Geo membranes 29, (3), 268-276,2011
- [14] S.K.Dash, and M.C.Bora, "Improved performance of soft clay foundations using stone columns and geo cell sand mattress". Geotext and Geomembranes 41,25-35,2013
- [15] K.Deb, P.K.Basudha. S.Chandra, "Generalized model for geosynthetic reinforced granular fill-soft soil with stone columns". International Journal of Geomechanics (ASCE) 7, 266-276,2007
- [16] K.Deb,et.al, "Response of multilayer geosynthetic –reinforced bed resting on soft soil with stone columns". J. Comput. geomech 35,323-330,2008
- [17] P.Debnath, and A.K.Dey, "Bearing capacity of geo grid reinforced sand over encased stone columns in soft clay". Geotextiles and Geo membranes 45, 653-664,2017
- [18] S.I.Dipty, and M.S.Girish, "Suitability of different materials for stone column construction. EJGE , Volume 14 , pp 1-12,2009
- [19] M.B.D.Elsawy, "Behavior of soft ground improved by conventional and geogrid encased stone columns based on FEM study".Geosynthetics International ,20, No -04,276-285,Engineers, London, 32–44,2013
- [20] M.Y.Fattah,et.al, "Experimental analysis of embankment on ordinary and encased stone columns".Int.J. Geomech,16 (4), 04015102,2016
- [21] Ghazavi.M.,et.al "Bearing capacity of horizontally layered geo synthetic reinforced stone columns ",Geotextiles and Geo membranes 46, 312-318,2018
- [22] J.Gniel, and A.Bouazza, " Improvement of soft soils using geo grid encased stone columns". Geotextiles and Geo membranes 27,(3),167-175,2009
- [23] J.Gniel, and A.Bouazza, "Construction of geo grid encased stone columns a new proposal based on laboratory testing". Geotextiles and Geo membranes 28, 108-118,2010
- [24] R.R Goughnour, " Settlement of vertically loaded stone columns in soft ground". Proc., 8th European Conf. on Soil Mechanics, and Foundations Engineering, Helsinki, Finland, 1, 1983,235–240.1983
- [25] D.A.Greenwood, "Mechanical improvement of soils below ground surfaces. " Proc., Ground Engineering Conf., Institution of Civil Engineers, London,11–22,1970
- [26] Z.Guetif, et.al, "Improved soft clay characteristics due to stone column installation". J. Comput Geotech 34, 104-111,2007
- [27] J.M.O.Hughes, and N.J.Withers, "Reinforcing of soft cohesive soils with stone columns".Ground Eng., 73,42–49,1974

- [28] J.M.O.Hughes, and N.J.Withers, "A field trial of reinforcing effect of stone column in soil". Proc., Ground Treatment by Deep Compaction, Institution of Civil Engineers, London, 32–44, 1976
- [29] B. Indraratna, C. Bamunawita, and H. Khabbaz, "Numerical modeling of vacuum preloading and field applications", Can. Geotech. J., 41, 1098-1110, 2004
- [30] IS:15284-2003 Indian Standard code of practice for design and construction for ground improvement –guidelines
- [31] M.Jamal, and Y.Tandel, "Group performance of geo encased sand column .Volume 5 , ISSN- 2249-555X, Issue ,Jan Special Issue 2015
- [32] M.Jamal., and Y.Tandel, " Group performance of Geo encased sand column". Indian Applied research, volume 5,ISSN -2249 -555X, Issue 1 Jan special Issue 2015
- [33] H.G. Kempfert, "Ground improvement methods with special emphasis on column type techniques" ,In proceedings ,International work shop on geo techniques of soft soils-theory and practice,pp 101-112,2003
- [34] H.Krish,et.al, " Ground improvement using vibro replacement in Asia 1994- 2004: A 10 tear Review". Proc 2nd Conference on Ground Improvement Techniques ,Kuala Lumpur ,Maleysia,2004
- [35] Mahmoud Ghazavi, and J. Nazari Afshar, " Bearing capacity of geo synthetic encased stone columns", Geotextiles and Geo membranes 38,26-36,2013
- [36] M.S. Dixit and K. A. Patil, "Effect of Gradation on Bearing Capacity and Settlement of Reinforced Sand", Electronic Journal of Geotechnical Engineering, Volume (18), Bun. 18/R, pp 3845-3856, October 2013
- [37] M.S. Dixit and K. A. Patil, Effect of Roughness of Footing on Ultimate Bearing Capacity, Settlement and Ny Values", Electronic Journal of Geotechnical Engineering, Volume (18), Bun. 18/O, , pp 3167-3184,September 2013
- [38] M.S. Dixit and K. A. Patil, "Effect of Roughness of Footing on Ultimate Bearing Capacity, Settlement and Ny Values", Electronic Journal of Geotechnical Engineering, Volume (18), Bun. 18/O, , pp 3167-3184, September 2013
- [39] M.S. Dixit and K. A. Patil, "Experimental Estimate of Ny Values and Corresponding Settlements for Square Footings on Finite Layer of Sand", Geomechanics and Engineering, International Journal, Technopress, Korea, Volume 5, No. 4, , pp 363-377. ISSN Print : 2005-307X, ISSN online: 2092-6219, August 2013
- [40] M.R. Madhav, and P.P Vitkar, " Strip footing on weak clay stabilized with a granular trench or pile. " Can. Geotech. J., 154, 605–609, 1978
- [41] S.N.Malarvizhi, and K.Ilamparuti, " Load versus settlement of clay bed stabilized with stone and reinforced stone column.3<sup>rd</sup> Asian Regional Conference on Geosynthetic,pp.322-329,2004
- [42] Malarvizi,S.N., and Ilamparuti ,K."Comparative study on the behavior of encased stone column and conventional stone column". Soils and Foundations ,47, No 5, 873-885,2007
- [43] D.McKelvey, V.Sivakumar, A.Bell, and J.Graham, "Modeling vibrated stone columns on soft clay". Geotech. Eng., 157GE3, 137–149,2004
- [44] N. Mehrannia, et.al, " Experimental investigation on the bearing capacity of stone columns with granular blanket" .Geotech Geol Engg ,10706,-017-03176,2017
- [45] M.Miranda, and A.Da costa,A, " Laboratory analysis of encased stone columns". Geotext and Geo membranes , 44(3),269-277,2016
- [46] M.Murugesan, and K.Rajgopal, "Geosynthetic encased stone columns : Numerical evaluation" . Geotextiles and Geo membranes ,24, No.6, 349-358,2006
- [47] M.Murugesan, and K.Rajgopal,"Model tests on geosynthetic encased stone columns". Geotextiles and Geo membranes,14 ,No.5 , 2007, 346-354
- [48] M.Murugesan, and K.Rajgopal, "Studies on the behavior of single and group of geo synthetics encased stone columns" .Journal of Geotechnical and Geo environmental Engineering ,136, No-1,129-139,2010
- [49] Pulko,et.al, "Geosynthetic Encased stone columns: analytical calculation model" . Geotextiles and Geo membranes ,29, No.1, 29-39,2011
- [50] Raithel et.al, "Foundation of construction on very soft soils with geotextile encased columns state of art" Geo Frontiers ,ASCE, publication N0-130-142, 2011,pp-1867-1877

- [51] M.Raithel,H.G. Kempfert, " Calculation models for dam foundations with geotextile coated sand columns",Proceedings of the International Conference on Geotechnical and Geological Engineering, GeoEngg, Melbbourne,2000
- [52] M.Raithel,H.G.Kempfert,A.Kirchner, " Geotextile-encased columns(GEC) for foundation of a dike on very soft soils", Proceedings of seventh International Conference on Geosynthetics, Nice, France,2002
- [53] G.Rajasekaran. and S.N. Rao. " Compressibility behavior of lime-treated marine clay", Ocean Engineering 29, 545-559,2002
- [54] L.Rao.,and M. Madhira, "Evaluation of optimum spacing of stone columns" .Indian Geotechnical Conference. December 16-18th ,IGS Mumbai chapter,2010
- [55] S. Sathish, O.P.Yadav, and M.Deepak, " Soft ground improvement using stone columns—A field trial" Proc., Indian Geotech. Conf., Vadodara, India,311–314,1997
- [56] J.T. Shahu ,et.al, " Analysis of soft ground granular pile granular system" .Computer Geotech. 27 (1), 45-62,2000
- [57] R.S.Sharma.et.al, " Compressive Load response of granular piles reinforced with geogrids". Canadian Geotechnical Journal ,41,No-01, 187-192,2004
- [58] R.S.Sharma.,et.al"Compressive load response of granular piles reinforced with geogrids", Can. Geotech. J. Vol. 41, 187-192,2014
- [59] R.Shivashankar, et.al "Experimental studies on behavior of stone columns in layered soils". Geotech Geol Engg 29 (5), 749-757,2011
- [60] R.Shivashankar,et.al" Stone columns with vertical circumferential nails-Laboratory model study". Geotech Geol Engg 28 (4) ,695-706,2010
- [61] V.Sivakumar ,et.al, " A laboratory model study of the performance of vibrated stone columns in soft clay". In: Proceedings,14th European conference on soil mechanics and geotechnical engineering ,Madrid,2007
- [62] C.S.Wu ,and Y.S.Hong, " The behavior of a laminated reinforced encapsulated sand columns". Geotextiles and Geo membranes, 26,No.4,302-316,2008
- [63] C.S.Wu ,and Y.S.Hong, " Laboratory tests on geosynthetic encapsulated sand columns". Geotextiles and Geo membranes ,27, No.2,107-120,2009
- [64] Y.Zhang,et.al , " Consolidation of composite foundation improved by geosynthetic encased stone columns". Geotextiles and Geo membranes ,32, June ,10-17,2012